Azimuth

SOCKET TEST FOR LEADLESS CHIP CARRIER

6040 SERIES

11/00

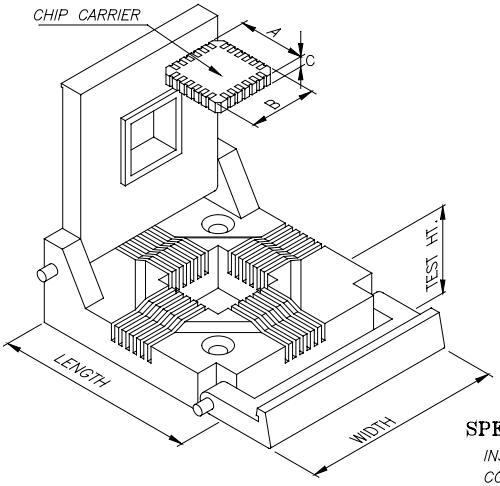

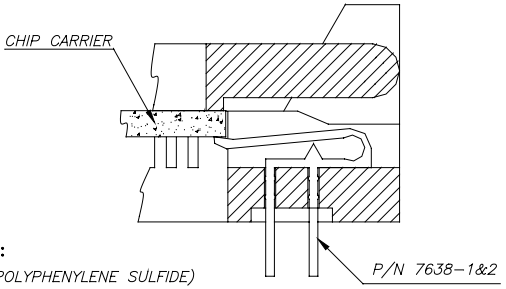

SPECIFICATIONS:

INSULATOR: PPS (POLYPHENYLENE SULFIDE)
CONTACT: BeCu., SPRING TEMPERED
30u GOLD OVER 30u NICKEL
THERMAL RANGE: -55°C/+155°C

FEATURES:

REPAIRABLE.

ORDERING INFORMATION FOR PARTS NOT IN TABLE:

6040-____-____-____-____/____-____-____-____-____

- SERIES No.
- PAD SPACING
- NUMBER OF PADS
- 'A' DIMENSION
- 'B' DIMENSION
- 'C' DIMENSION
- H = HINGED LID
- C = CORNER PADS

PART NUMBER	TOTAL CONTACTS	CONTACT SPACING	A	B	C	LENGTH	WIDTH	TEST HEIGHT
6040-035-36-355/355-060H	36	.035	.355	.355	.060	1.200	1.200	.500
6040-035-40-410/410-060H	40	.035	.410	.410	.060	1.200	1.200	.500
6040-035-48-460/460-060H	48	.035	.460	.460	.060	1.200	1.200	.500
6040-035-56-528/528-067HC	56	.035	.528	.528	.067	1.500	1.500	.710
6040-040-28-405/405-067H	28	.040	.405	.405	.067	1.200	1.200	.500
6040-040-40-400/400-060HC	40	.040	.400	.400	.060	1.200	1.200	.500
6040-040-84-1.200/1.200-023H	84	.040	1.200	1.200	.023	1.900	1.900	.650
6040-040-180-2.000/2.000-020H	180	.040	2.000	2.000	.020	3.060	2.750	.650
6040-050-18-270/270-065HC	18	.050	.270	.270	.065	1.200	1.200	.500
6040-050-28-500/500-125H	28	.050	.500	.500	.125	1.141	1.100	.562
6040-050-32-825/510-080H	32	.050	.825	.510	.080	1.500	1.650	.720
6040-050-40-750/560-110H	40	.050	.750	.560	.110	1.500	1.500	.710
6040-050-48-730/1.200-145H	48	.050	.730	1.200	.145	1.807	2.140	.897
6040-100-24-790/1.330-160H	24	.100	.790	1.330	.160	1.807	2.140	.897

Azimuth ELECTRONICS, INC.

2605 So. EL CAMINO REAL
SAN CLEMENTE, CA 92672 USA

(949) 492-6481 FAX (949) 492-0744
Email: sales@azimuth-electronics.com
www.azimuth-electronics.com